BEST FENCE

INSTRUCTION MANUAL



FOR ALL BEST FENCE SYSTEMS

SOME FEATURES AND ACCESSORIES MAY NOT BE INCLUDED WITH YOUR SYSTEM. PLEASE VISIT WWW.FASTCAP.COM FOR MORE DETAILS.


FastCap, LLC

5016 Pacific Highway Ferndale, WA 98248

Toll Free: 1-888-443-3748 Phone: 1-360-752-2138 Fax: 1-360-650-1075

Web: www.fastcap.com Email: info@fastcap.com

BEST FENCE STAND SETUP

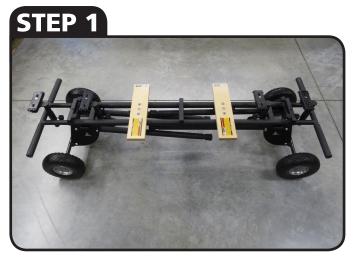


POSITION THE STAND WHERE YOU WANT TO SET IT UP




RELEASE LEGS BY PULLING HANDLES
ON BOTH SIDES



LIFT ONE SIDE OF FENCE AND PULL LEGS TO STANDING POSITION

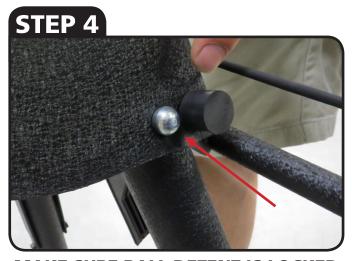


MAKE SURE BALL DETENT IS LOCKED IN STANDING POSITION



REPEAT ON OTHER SIDE TO FINISH STAND SETUP

BEST FENCE WHEEL INSTALLATION



LOCATE WHEELS LOCK PINS IN HARDWARE KIT



SLIDE WHEEL ONTO AXLE



INSERT LOCKING PIN THROUGH HOLE IN AXLE



FLIP DOWN RING TO LOCK PIN IN PLACE

BEST FENCE SAW SETUP



POSITION SAW MOUNT ON RAILS WITH PLASTIC BRACKET PARALLEL



ROTATE BRACKET 90° AND TIGHTEN KNOB TO LOCK IN PLACE



ALLOW ENOUGH SPACING FOR RACK WHEN APPLICABLE






MOUNT SAW WITH PROVIDED POWERHEAD SCREWS (FOUND IN HARDWARE KIT)

BEST FENCE CUSTOM MOUNTING INSTRUCTIONS




WANT TO FIX THE GAP? FOLLOW THE INSTRUCTIONS OR SCAN QR CODE TO WATCH THE VIDEO!




PULL THE PIN OUT OF THE FENCE SO THE FENCE IS LOOSE




LIFT FENCE UP AND SLIDE IT TO THE DESIRED POSITION AND POP IT BACK INTO PLACE



PENCIL IN A LINE FOLLOWING THE CENTER OF THE ORIGINAL HOLE. 5/16" FROM THE BOTTOM & 5/8" FROM THE TOP



USE A CLAMP TO HOLD THE FENCE AND POST TOGETHER AND DRILL A HOLE



PUSH THE PIN INTO YOUR NEWLY DRILLED HOLE TO CHECK THE FIT

BEST FENCE PRO BAG & RACK



ATTACH FRONT BAG RACK BY SLIDING POST INTO HOLE




SLIDE BAG ONTO FRONT RACK

BEST FENCE PRO ACCESSORIES




INSERT WORK TABLE INTO ACCESSORY HOLE WHERE DESIRED

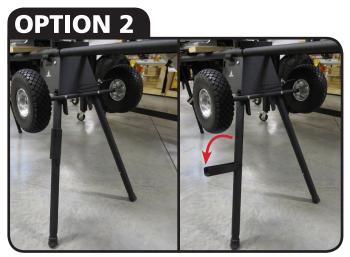

LUMBER RACKS CAN BE FOLDED OPEN TO SUPPORT EXTRA LUMBER

BEST FENCE PRO MALE-MALE SETUP




POSITION MALE-MALE CONNECTOR SO THAT FENCE END IS ON MIDDLE LINE



PENCIL IN A LINE 5/16" FROM THE BOTTOM & 5/8" FROM THE TOP OF THE FENCE, ABOVE THE MALE-TO-MALE CONNECTOR



DRILL THROUGH ALUMINUM AND PLASTIC. USE ATTACHED PIN TO SECURE IN PLACE



ATTACH SECOND FENCE AND POSITION UPPER HAND FOR SUPPORT



REPEAT STEP 3 ON SECOND FENCE



BEST FENCE CROWN MOLDING STOP



LOCATE COMPONENTS IN ACCESSORY BAG



ATTACH ARM BY
HOOKING REAR FIRST THEN
TIGHTENING WEDGE KNOB



ADJUST L-BRACKET AND PLASTIC SLIDE TO FIT SIZE OF YOUR CROWN MOLDING



TO REMOVE ARM, SLIDE ALL PIECES OFF THE BEST FENCE. UNSCREW BOTTOM KNOB AND PUSH UP TO RELEASE WEDGE FROM BEST FENCE.

ACCESSORIES + MORE









11th Finger

Crown Molding Stop

Fence Adapter Block








Best Fence Stop

Male-Male Connector

Mag Power Strip Mount





Best Fence Accessory Bag

Fence by the Foot









Work Table

Wheel Assembly (per side)

Precision Adjustment Block

Zero Clearance Tape







ChopShop Sawhood PRO

ChopShop Sawhood

10 Million Dollar Stick